



**flosense**<sup>®</sup>  
FLEXIBLE FLOW MONITORING



## Flosense; the new affordable, flexible flow monitoring system designed for accurate measuring and monitoring of flow, temperature and pressure variations in cooling circuits


Flosense measures flow, temperature and pressure on a single flow channel using a single combined sensor. When used in an injection moulding circuit Flosense also has the ability to connect to a second temperature and pressure sensor.

Flosense calculates and displays the difference in temperature and pressure known as 'Delta T' and 'Delta P' with one sensor on the 'flow' and one on the 'return'.

Using these values, Flosense provides an indication of the stability of the process and checks the efficiency, identifying wasted energy and variations in pressure which could indicate leaks or blocked waterways.

Flosense is designed to be installed in various locations within the cooling circuit including the main water supply, the mould heater, critical cooling channels or distribution manifolds.

Quick to install and easy to set-up, Flosense is a critical component in any injection moulding configuration and should form part of any setup where cost control and quality are key considerations.

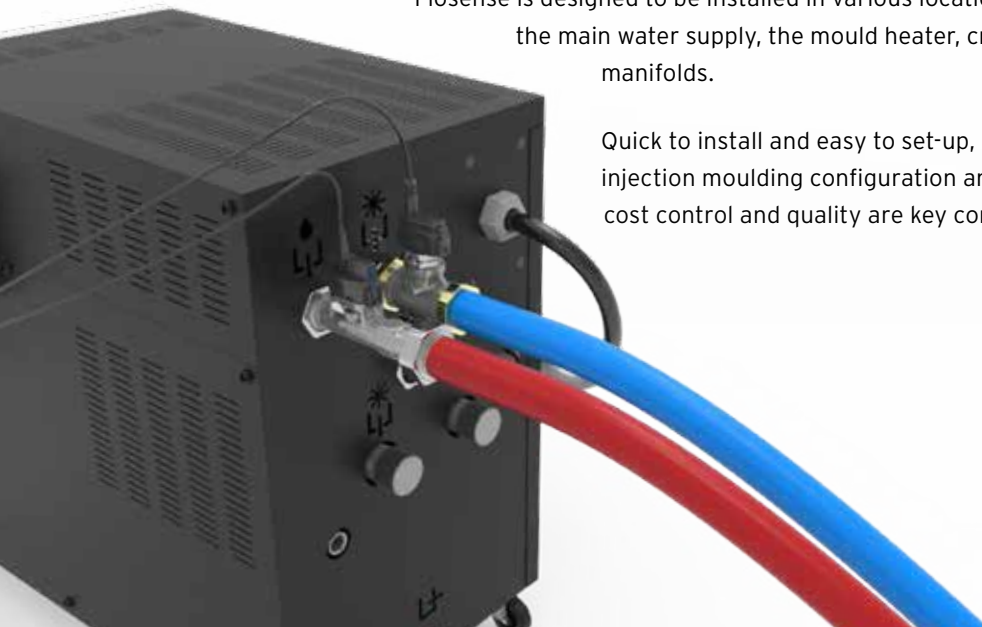




Pressure loss is caused by hoses, fittings and valves and will affect the productivity.

Difference between inlet pressure and return pressure is measured as **Delta P**.

Variation in Delta P could indicate pump failure, blocked waterway, leaks etc.

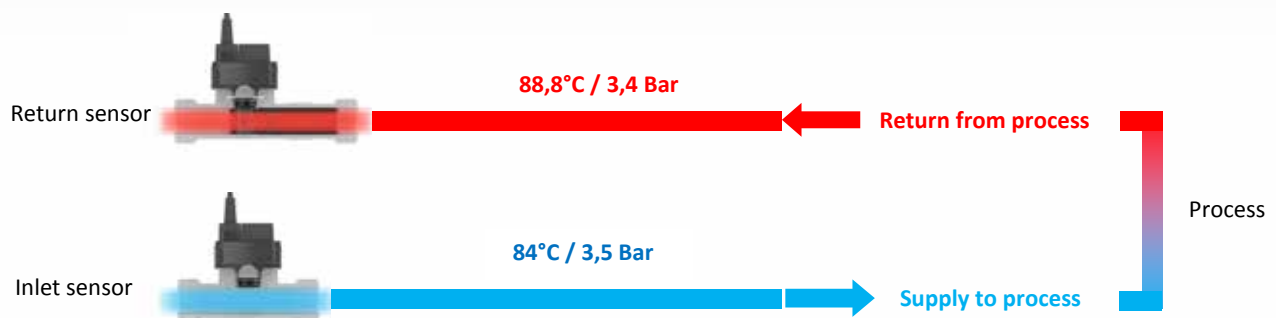


As the cooling water passes through the mould it transfers heat from the steel into the cooling water. The more turbulent the flow the more efficient this process of cooling.

Difference between inlet temperature and return temperature is measured as **Delta T**.

Sudden variation in Delta T may be caused by a faulty heater/cooler, blocked channel, scale build up etc.

Flosense, provides visibility of key cooling circuit metrics, improves efficiency, enhances productivity and profitability.



→ **ENERGY TRANSFER INDICATOR**

Heat is transferred from the mould through the water channels, Flosense calculates the heat transfer as energy units BTU or kWh. This feature illustrates the efficiency of the process.



→ **TURBULENT FLOW INDICATOR**

Often regarded as a key indicator in the efficiency of a mould cooling circuit, Flosense is fitted with a turbulent flow indicator. The unit will indicate laminar, transitional and turbulent flow as well as monitoring the Reynolds number, based on flow diameter and percentage glycol in the system.

Improving the flow from laminar to turbulent can increase the heat transfer efficiency by up to 500%.

Flosense, provides features and interfaces to monitor, analyse and verify data, essential for your productivity and quality.



→ **ALARM OUTPUT**

With programmable alarm limits on flow, temperature and pressure any variation in the values being monitored will trigger an on-screen alarm. An external alarm output signal can be connected to auxiliary equipment which could be a visual or audible beacon, the mould heater or the injection moulding machine.

Even in a 'hose burst' situation the unit will identify a sudden loss of pressure and the unit can either be connected to an alarm or could be used to automatically shut down the mould heater.



→ **DATA RECORDING**

Data is recorded and stored in the internal memory enough to display data for the previous 30 days.

Flow, Temperature and Pressure is logged and may be viewed in the graph screen.



The last 30 days of data is recorded and stored on the internal memory.




→ **DATA EXPORT**

It is also possible to download the data to a laptop using the integrated USB port for further analysis.

The data is stored as text file can be analysed using excel or other analysing software.

## SINGLE SENSOR KIT

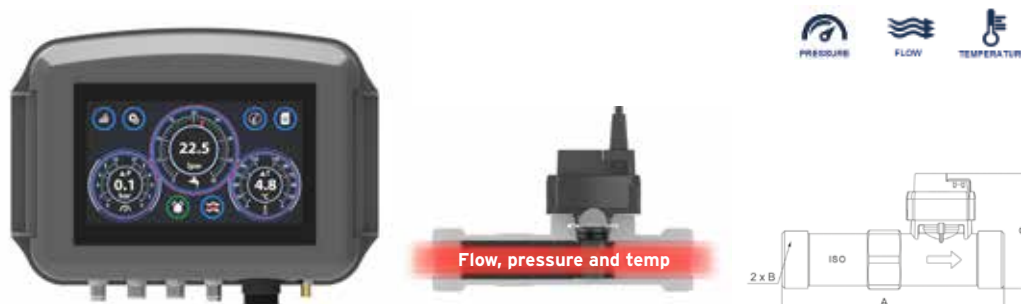

Part No.	Flow capacity l/m	A	Connection B	C	Max temperature	Pressure Range
FS-115-K	2-15	110	G 3/4"	58,8	120°C	0-10 Bar
FS-240-K	4-40	110	G 3/4"	58,8	120°C	0-10 Bar
FS-5100-K	10-100	129	G 1"	66,5	120°C	0-10 Bar
FS-10200-K	20-200	137,5	G 1-1/4"	74,1	120°C	0-10 Bar

### Description

Supplied as a Kit FloSense comes complete with Touch Screen, Magnetic Bracket, Power Supply, USB Cable, Multi-Sensor and Cables.

## DUAL SENSOR KIT



Part No.	Flow capacity l/m	A	Connection B	C	Max temperature	Pressure Range
FS-115-10-K	2-15	110	G 3/4"	58,8	120°C	0-10 Bar
FS-240-10-K	4-40	110	G 3/4"	58,8	120°C	0-10 Bar
FS-5100-10-K	10-100	129	G 1"	66,5	120°C	0-10 Bar
FS-10200-10-K	20-200	137,5	G 1-1/4"	74,1	120°C	0-10 Bar

### Description

Supplied as a Kit FloSense comes complete with Touch Screen, Magnetic Bracket, Power Supply, USB Cable, Multi-Sensor, Inlet Sensor and Cables.

### SWIVEL HOSETAIL FITINGS




Stainless Steel Part No.	Brass Part No.	A1 x D1	Sensor Ref.
	CFR3/4-13	3/4" X 13	FS-115
HT-316-2	CFR3/4-19	3/4" X 19	FS-240
HT-316-3	CFR1-25	1" x 25	FS-5100
HT-316-4	CFR1.1/4-32	1.1/4 x 32	FS10200

### GASKETS




Part No.	Part No.	A1 x D1	Sensor Ref.	Part No.
	CFR3/4-13	3/4" X 13	FS-115	GK34
HT-316-2	CFR3/4-19	3/4" X 19	FS-240	GK34
HT-316-3	CFR1-25	1" x 25	FS-5100	GK1
HT-316-4	CFR1.1/4-32	1.1/4 x 32	FS10200	GK114

### TOUCH CONTROL

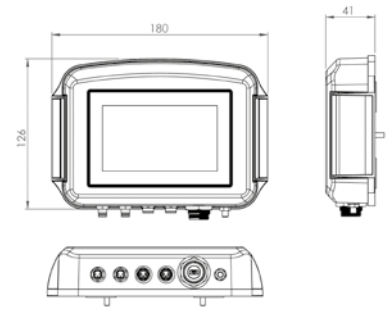

Part No.	Display Type	Sensor Input	Alarm Output	Voltage
FS-T400	Touch	2	Yes	12 V.

### MULTI SENSOR UNIT



Part No.	Flow capacity l/m	A	B	C	Max temperature	Pressure Range	Hosetail Ref.
FS-115	2-15	110	G 3/4"	58,8	120°C	0-10 Bar	CFR3/4-13
FS-240	4-40	110	G 3/4"	58,8	120°C	0-10 Bar	HT-316-2 / CFR3/4-19
FS-5100	10-100	129	G 1"	66,5	120°C	0-10 Bar	CFR1-25 / CFR1-25
FS-10200	20-200	137,5	G 1-1/4"	74,1	120°C	0-10 Bar	HT-316-4 / CFR1.1/4-32

#### Description


Includes Flow Pipe and Multi Sensor (cable not included)

### PRESSURE & TEMPERATURE SENSOR



Part No.	Pressure Range Bar	Thread	Max. Temp.
PS-100-G1/2	0-10	1/2" BSPP	120°C

### T-CONNECTOR

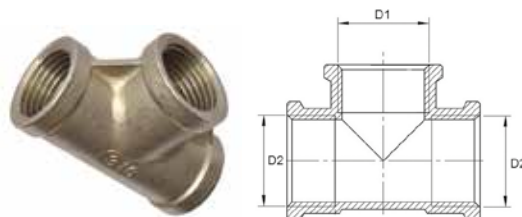

Part No.	D1	D2
T-316-1	1/2"	1/2"
T-316-2	1/2"	3/4"
T-316-3	1/2"	1"
T-316-4	1/2"	1.1/4"
T-316-5	1/2"	1.1/2"

### SENSOR CABLE



Part No.	Connection	Length (mm)
FS-SC1200	M8/Molex	1200
FS-SC2900	M8/Molex	2900

### SENSOR CABLE



Part No.	Connection	Length (mm)
FS-EC1000	M8/M8	1000
FS-EC2000	M8/M8	2000
FS-EC5000	M8/M8	5000

### SPARE MULTI SENSOR



Part No.	Flow capacity l/m
FS-S1-15	2-15
FS-S2-40	4-40
FS-S5100	10-100
FS-S10200	20-200

### SPARE PRESSURE/TEMP SENSOR



Part No.	Pressure range Bar
PS-P10	0-10

Distributor

MOULDPRO ApS  
Baltorpbakken 10  
DK-2750 Ballerup, Denmark  
[www.mouldpro.com](http://www.mouldpro.com)  
Phone: +45 7020 3131

flosense<sup>®</sup>  
BY MOULDPRO